


DN044708

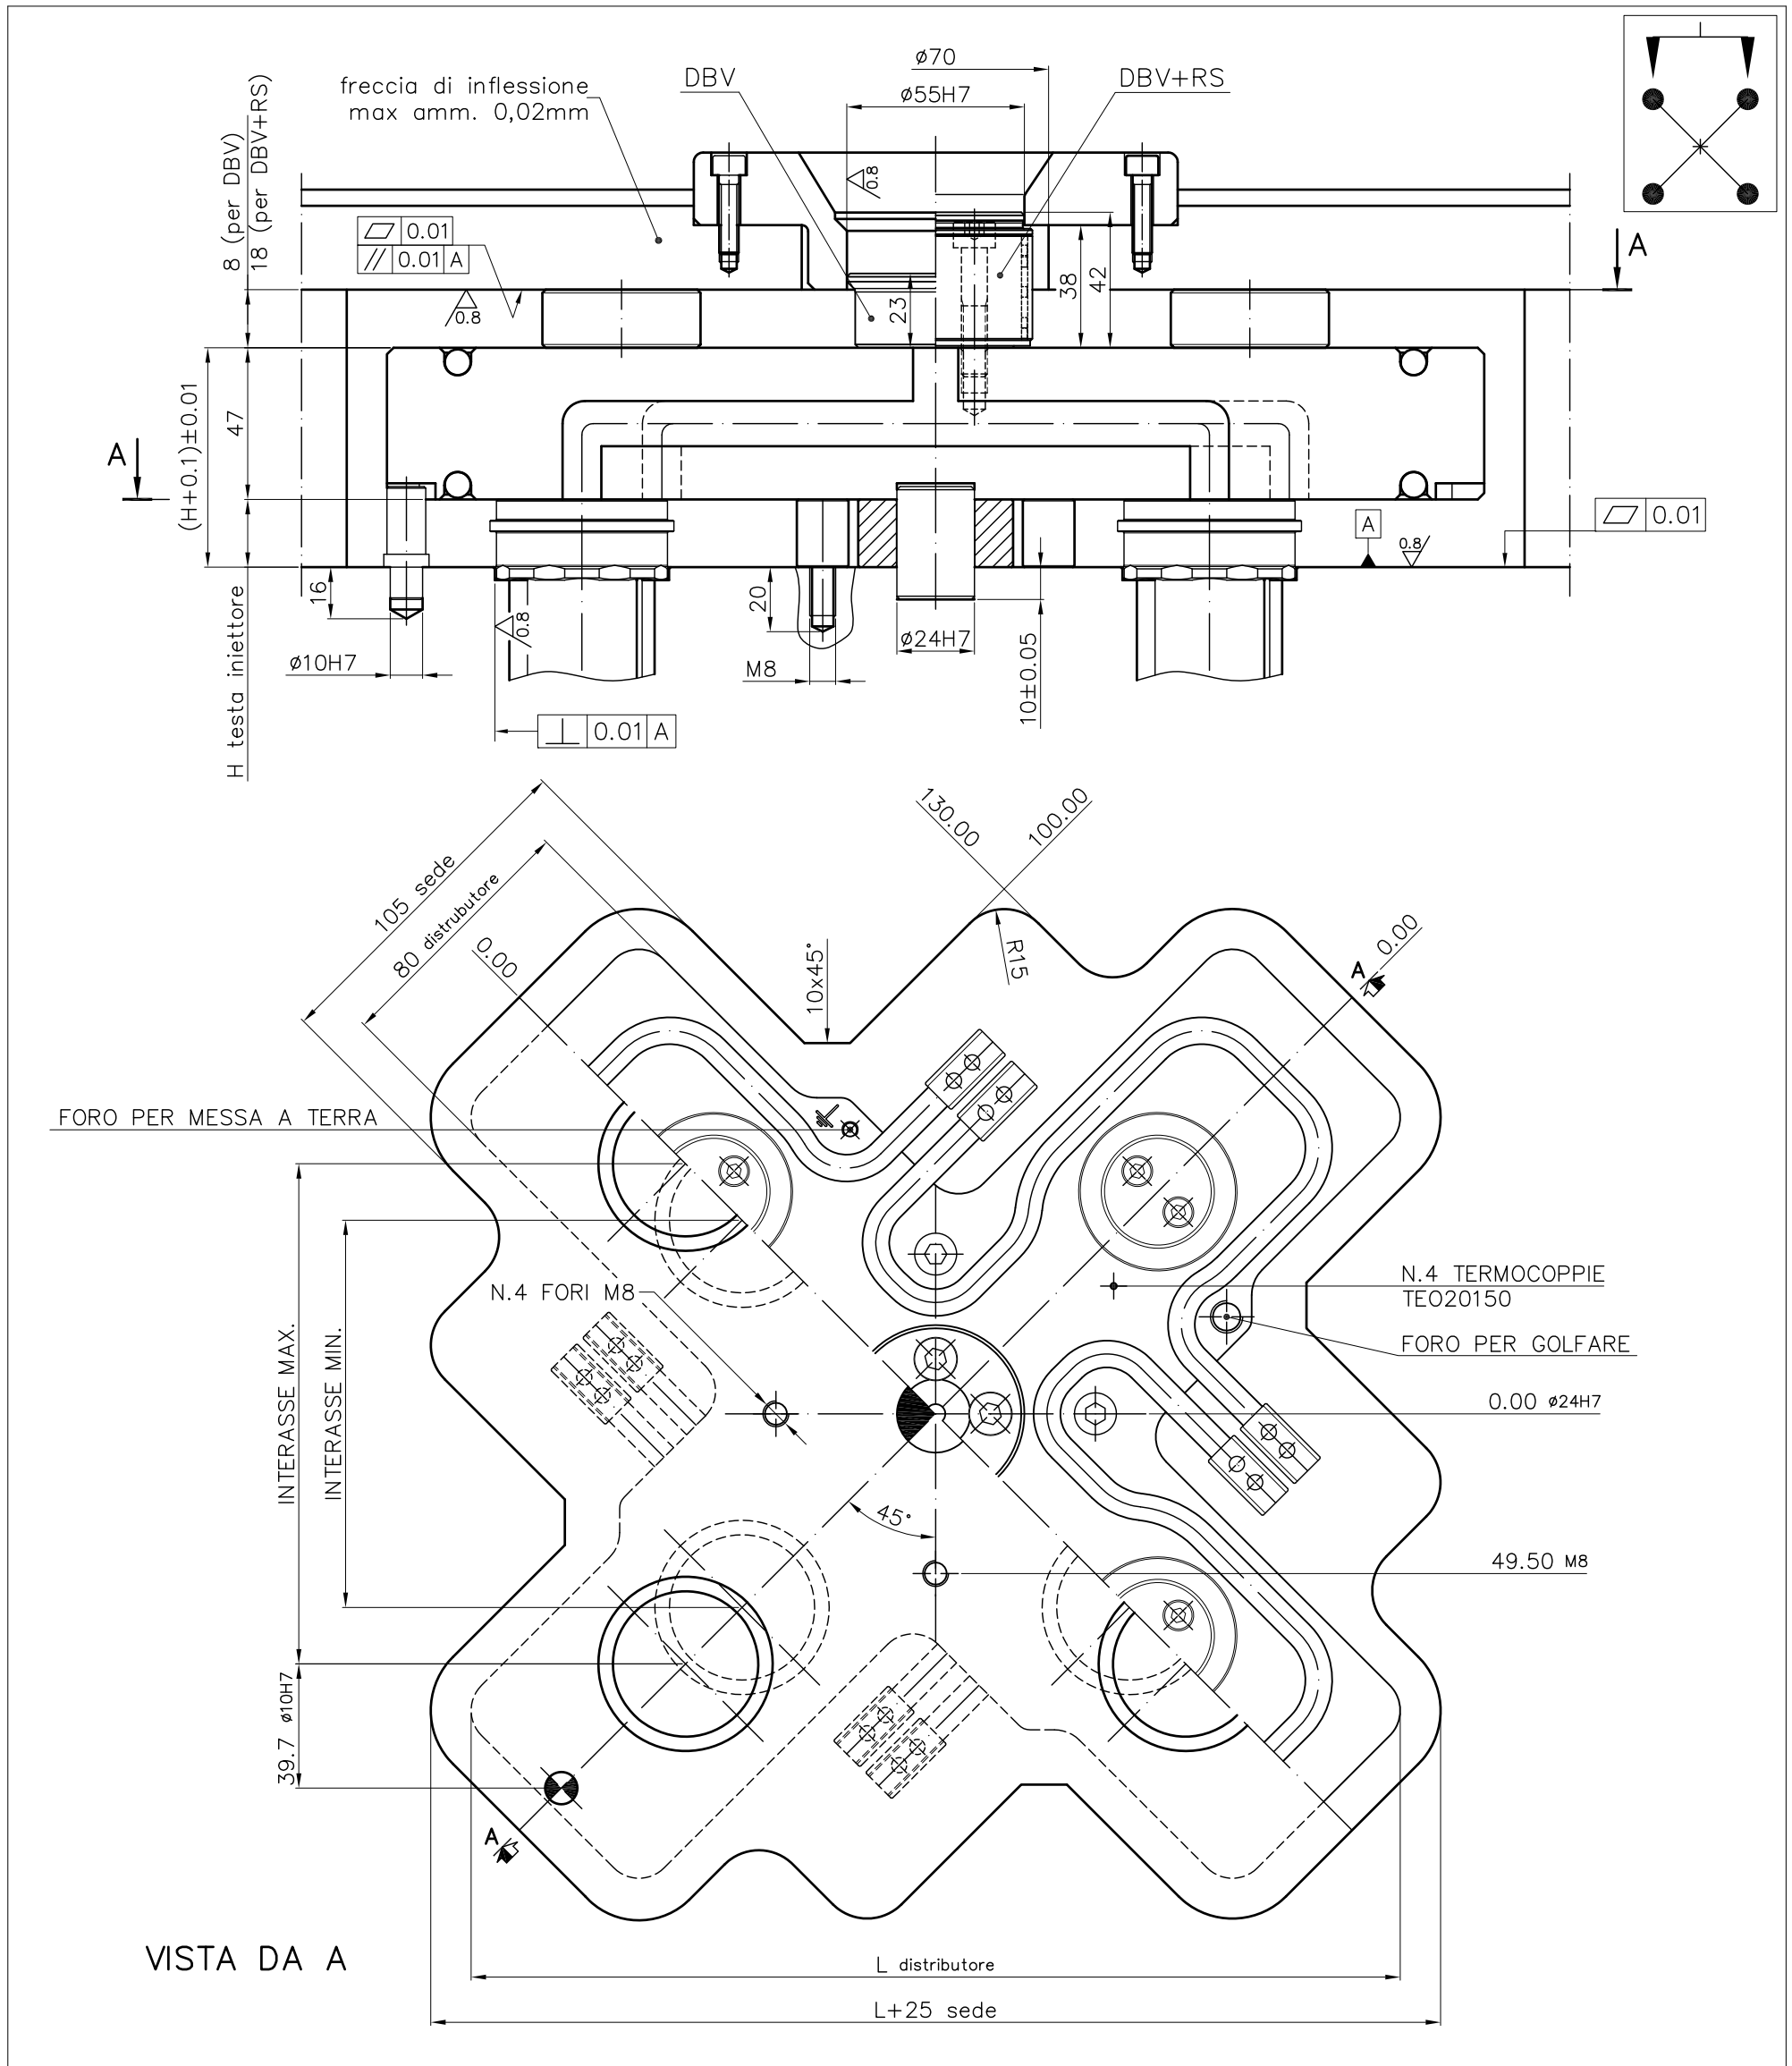

DISTRIBUTORE PER 4 PUNTI DI INIEZIONE

CODICE	interasse min/max	L distributore	R.T. q.tà x Watt
DN044708260	260/295	429.3	8 x 780W
DN044708295	295/330	464.6	8 x 860W
DN044708330	330/365	500	8 x 950W
DN044708365	365/400	535.4	8 x 1000W
DN044708400	400/435	570.7	8 x 1100W
DN044708435	435/470	606.1	8 x 1190W
DN044708470	470/505	641.4	8 x 1250W